


HT-1150-TNK / SAE

Part no.	Description	Flow (L/min.)	Weight (kg)	Hydraulic connections				Max. Pressure (bar)
				P	T	C	MPC	
14767213	TIP VALVE HT-TNK/SAE-1150-135-P $\frac{3}{4}$ "	150	3.7	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	135
14767215	TIP VALVE HT-TNK/SAE-1150-150-P $\frac{3}{4}$ "	150	3.7	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	150
14767217	TIP VALVE HT-TNK/SAE-1150-170-P $\frac{3}{4}$ "	150	3.7	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	170
14767219	TIP VALVE HT-TNK/SAE-1150-190-P $\frac{3}{4}$ "	150	3.7	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	190
14767222	TIP VALVE HT-TNK/SAE-1150-220-P $\frac{3}{4}$ "	150	3.7	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	220
14767225	TIP VALVE HT-TNK/SAE-1150-250-P $\frac{3}{4}$ "	150	3.7	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	250
14767263	TIP VALVE HT-TNK/SAE-1150-135-P1"	150	3.7	G1"	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	135
14767265	TIP VALVE HT-TNK/SAE-1150-150-P1"	150	3.7	G1"	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	150
14767267	TIP VALVE HT-TNK/SAE-1150-170-P1"	150	3.7	G1"	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	170
14767269	TIP VALVE HT-TNK/SAE-1150-190-P1"	150	3.7	G1"	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	190
14767272	TIP VALVE HT-TNK/SAE-1150-220-P1"	150	3.7	G1"	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	220
14767275	TIP VALVE HT-TNK/SAE-1150-250-P1"	150	3.7	G1"	G $\frac{3}{4}$ "	G $\frac{3}{4}$ "-SAE	G $\frac{1}{4}$ "	250


For direct mounting on

- TNK: Hyva tank mounting plate
- SAE: SAE inlet of Hyva cylinder

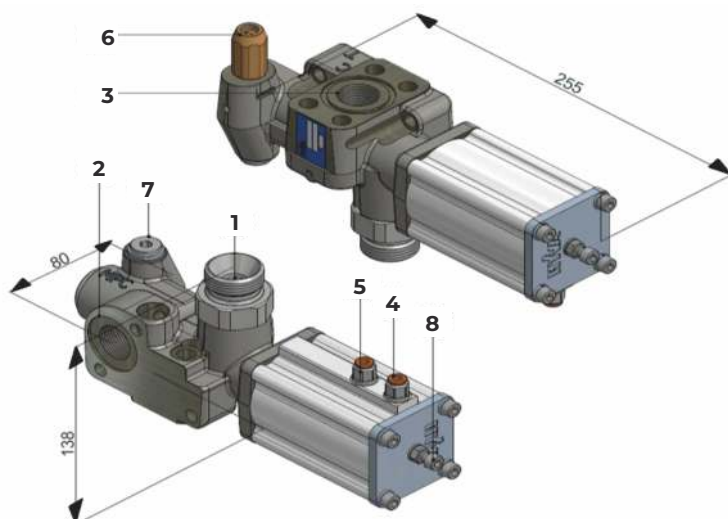

- 1 P Pump connection
- 2 T Tank connection
- 3 C Cylinder connection SAE
- 4 Pneumatic connection (Tip) 6 mm
- 5 Pneumatic connection (Lower) 6 mm
- 6 Pressure relief cartridge
- 7 MPC Measure Pressure Cylinder (Pressure gauge point)
- 8 Adjustment screw (int.hex. 5) (To adjust the lowering speed)

HYDRAULIC SYMBOL



SAFETY:

HT valve fitted on cylinder (SAE) port provides hose burst safety function

HT1150-P $\frac{3}{4}$ " - TNK/SAE



HT1150-P1" - TNK/SAE



MOUNTING KITS

Mounting kits	Kit number
Cylinder (SAE)*	14735162
Tank (TNK)*	14735168
** included with valve	

14735162



14735168



SEAL KITS AND AIR ASSEMBLY PARTS

Part no.	Description	Qty.
14844010	SEAL KIT PT/JT/HT VALVE	1
14810517	AIR COUPLING 1/8" - 6MM - 00	2

14844010



14810517

