


HT-1220-SAE


Part no.	Description	Flow (L/min.)	Weight (kg)	Hydraulic connections				Max. Pressure (bar)
				P	T	C	MPC	
14767453	TIP VALVE HT-SAE-1220-135-P1"	220	5.5	G1"	G1"	SAE	G $\frac{3}{4}$ "	135
14767455	TIP VALVE HT-SAE-1220-150-P1"	220	5.5	G1"	G1"	SAE	G $\frac{3}{4}$ "	150
14767457	TIP VALVE HT-SAE-1220-170-P1"	220	5.5	G1"	G1"	SAE	G $\frac{3}{4}$ "	170
14767459	TIP VALVE HT-SAE-1220-190-P1"	220	5.5	G1"	G1"	SAE	G $\frac{3}{4}$ "	190
14767461	TIP VALVE HT-SAE-1220-220-P1"	220	5.5	G1"	G1"	SAE	G $\frac{3}{4}$ "	220
14767463	TIP VALVE HT-SAE-1220-250-P1"	220	5.5	G1"	G1"	SAE	G $\frac{3}{4}$ "	250

For direct mounting on
 • SAE: SAE inlet of Hyva cylinder

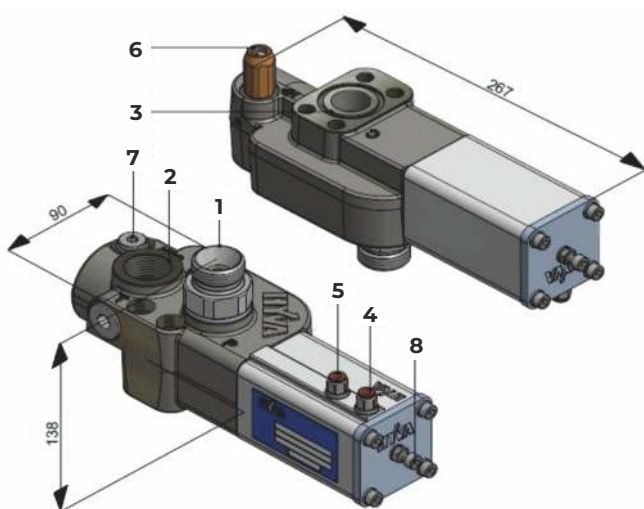

- 1 P Pump connection
- 2 T Tank connection
- 3 C Cylinder connection SAE
- 4 Pneumatic connection (Tip) 6 mm
- 5 Pneumatic connection (Lower) 6 mm
- 6 Pressure relief cartridge
- 7 MPC Measure Pressure Cylinder (Pressure gauge point)
- 8 Adjustment screw (int.hex. 5) (To adjust the lowering speed)

HYDRAULIC SYMBOL



SAFETY:


HT valve fitted on cylinder (SAE) port provides hose burst safety function



HT-1220-TNK


Part no.	Description	Flow (L/min.)	Weight (kg)	Hydraulic connections					Max. Pressure (bar)
				P	T1	T2	C	MPC	
14767111	TIP VALVE HT-TNK-1220-110-P1"	220	6.1	G1"	G½"	G1"	G1"	G¾"	110
14767113	TIP VALVE HT-TNK-1220-135-P1"	220	6.1	G1"	G½"	G1"	G1"	G¾"	135
14767115	TIP VALVE HT-TNK-1220-150-P1"	220	6.1	G1"	G½"	G1"	G1"	G¾"	150
14767117	TIP VALVE HT-TNK-1220-170-P1"	220	6.1	G1"	G½"	G1"	G1"	G¾"	170
14767119	TIP VALVE HT-TNK-1220-190-P1"	220	6.1	G1"	G½"	G1"	G1"	G¾"	190
14767122	TIP VALVE HT-TNK-1220-220-P1"	220	6.1	G1"	G½"	G1"	G1"	G¾"	220
14767125	TIP VALVE HT-TNK-1220-250-P1"	220	6.1	G1"	G½"	G1"	G1"	G¾"	250
14767128	TIP VALVE HT-TNK-1220-280-P1"	220	6.1	G1"	G½"	G1"	G1"	G¾"	280
14767135	TIP VALVE HT-TNK-1220-350-P1"	220	6.1	G1"	G½"	G1"	G1"	G¾"	350

For direct mounting on
• TNK: Hyva tank mounting plate

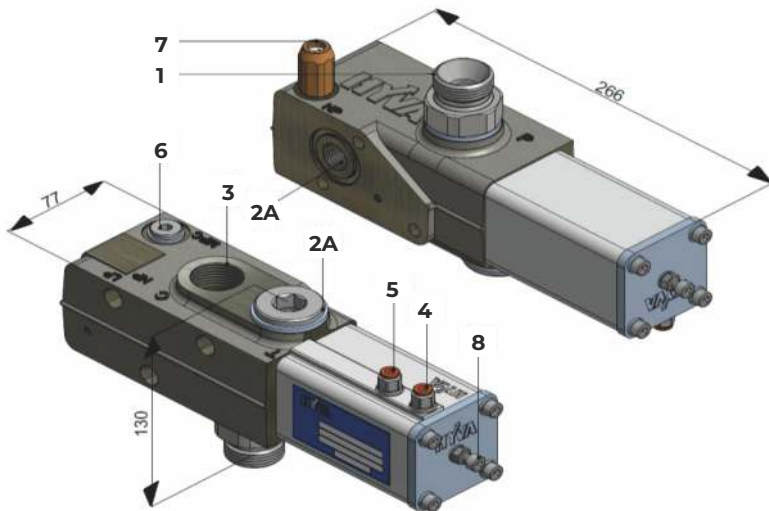

- 1 P Pump connection
- 2A T1 Tank connection
- 2B T2 Alternative tank connection
- 3 C Cylinder connection
- 4 Pneumatic connection (Tip) 6 mm
- 5 Pneumatic connection (Lower) 6 mm
- 6 MPC Measure Pressure Cylinder (Pressure gauge point)
- 7 Pressure relief cartridge
- 8 Adjustment screw (int.hex. 5) (To adjust the lowering speed)

HYDRAULIC SYMBOL



SAFETY:

HT valve fitted on cylinder (SAE) port provides hose burst safety function



MOUNTING KITS


Mounting kits	Kit number
Cylinder (SAE)*	14735175
Tank (TNK)*	14735168
Chassis**	14735208

* included with valve
** not included with valve

14735175



14735168

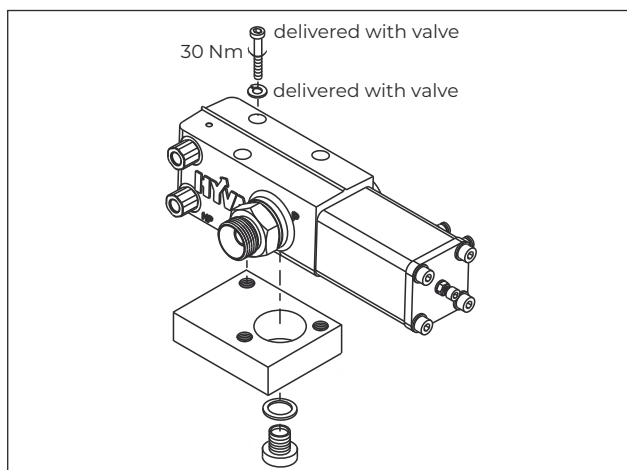

14735208



SEAL KITS AND AIR ASSEMBLY PARTS

Part no.	Description	Qty.
14844010	SEAL KIT PT/JT/HT VALVE	1
14810517	AIR COUPLING 1/8" - 6MM - 00	2

14844010



14810517



CHASSIS MOUNTING BRACKET FOR HT-1220 VALVES

Part no.	Description
09238050**	MOUNTING BRACKET HT/RELIEF/DIVERTER IN CHASSIS
** not included with valve, to be ordered separately	

